

Rotonics Guido® Freshwater and Fire Protection Tanks

www.rotonics.com/tanks/RMI/Guido.htm

RMI-1

- FDA approved High Density Linear Polyethylene (ANSI/NSF Standard 61).
- Impact and corrosion resistant.
- Seamless, one piece construction.
- Green opaque tanks blend with the environment, provide additional protection from UV rays, and reduce algae growth.
- Designed for containment of water (8.5 lbs./gal.).
- A concrete pad is recommended for installation. However, tanks may be placed on any flat level “compacted” surface.
- Tanks come with a standard 1-1/2” spin weld fill (#02017) and 2” Polypropylene discharge adapter (#93200). An optional 4” fire adapter, anti-vortex assemblies, and 3” water tank vents are available.
- Compliant with Local, State, and National standards for Fire Protection.



RMI has been a pioneer and, for the last three decades, a leading innovator in the manufacturing of all sizes of both Linear and Crosslink Polyethylene Tanks.



Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76330	330	47	53	8
76335	550	47	78	16
76340	600	72	42	16
76342	710	47	105	16
76350	1000	72	66	16
76349	1250	93	51	16
76360	1500	72	94	16

Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76376	1650	93	61	16
76391	2300	93	87	16
76381	2800	93	105	16
76407	4995	142	86	22
76408	5300	102	164	22
76410*	6500	118	142	22


*Molded-in lifting lugs available upon request.

Limited Tank Warranty: RMI warrants to the original purchaser all tanks manufactured by RMI to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. Review the chemical resistance guide and warranty instruction information prior to the installation and use of RMI Tanks. Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.

Rotonics Manufacturing Inc.
716 North 11th Avenue • Caldwell, ID 83605
Phone: (208) 454-9271 • Fax: (208) 454-3089
E-mail: idaho@rotonics.com
www.rotonics.com

Quality Products and Exceptional Service


Establishing an Emergency Water Supply

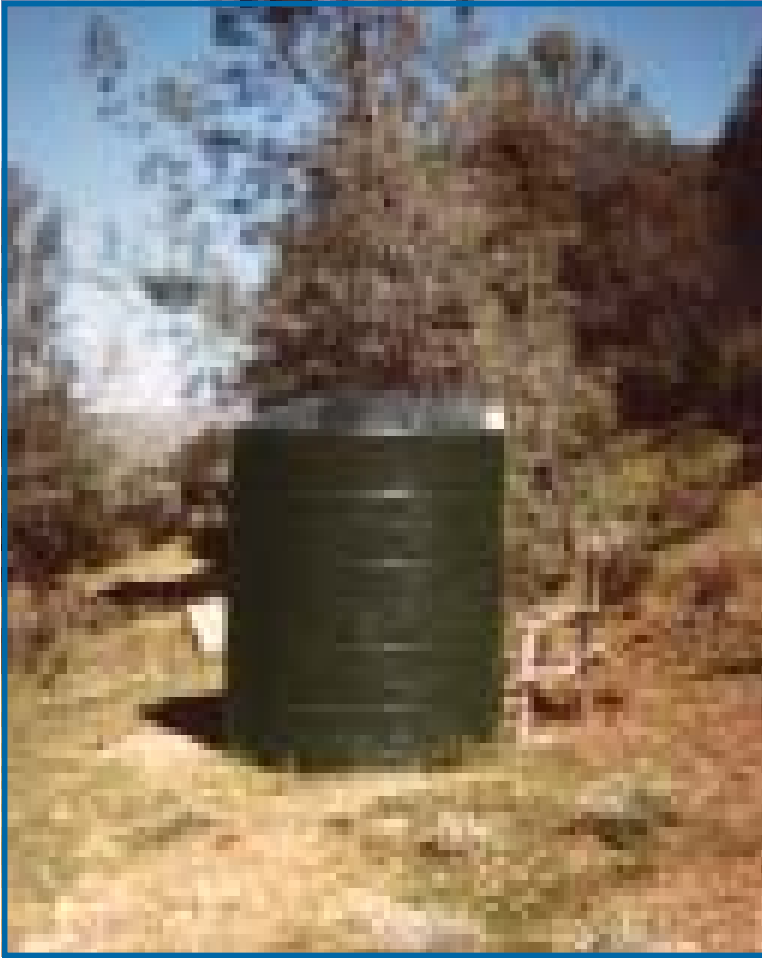

Official Information from the California Department of Forestry and Fire Protection


Maintain an emergency water supply that meets fire department standards through one of the following:

- A community water/hydrant system.
- A cooperative emergency storage tank with neighbors.
- A minimum storage supply of 2,500 gallons on your property.

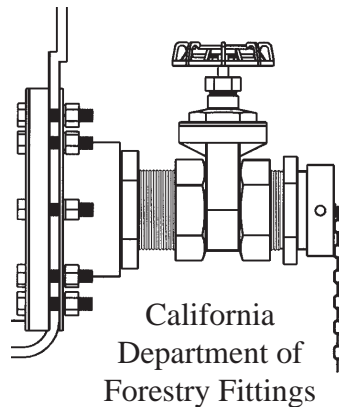

RMI Tanks have provided potable and emergency water supplies for over 30 years

Fittings and Accessories Installed per your Specifications.

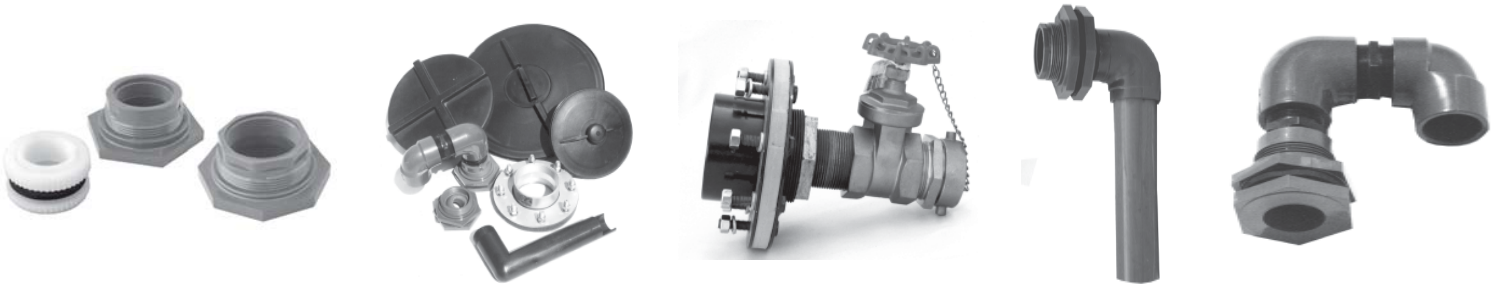

Limited Tank Warranty: RMI warrants to the original purchaser all tanks manufactured by RMI to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. Review the chemical resistance guide and warranty instruction information prior to the installation and use of RMI Tanks. Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.

Rotonics Manufacturing Inc.
716 North 11th Avenue • Caldwell, ID 83605
Phone: (208) 454-9271 • Fax: (208) 454-3089
E-mail: idaho@rotonics.com
www.rotonics.com